

Thrust screws with loose T-bar, DIN 6306

Item description/product images



Description

Material:

Steel.


Version:

Black oxidised. Thrust pin hardened.

Note:

Pad Screws with movable spindle have a moving spindle that is held by a compression spring in each desired position. Stop-rings are used to limit the movement.

Drawings

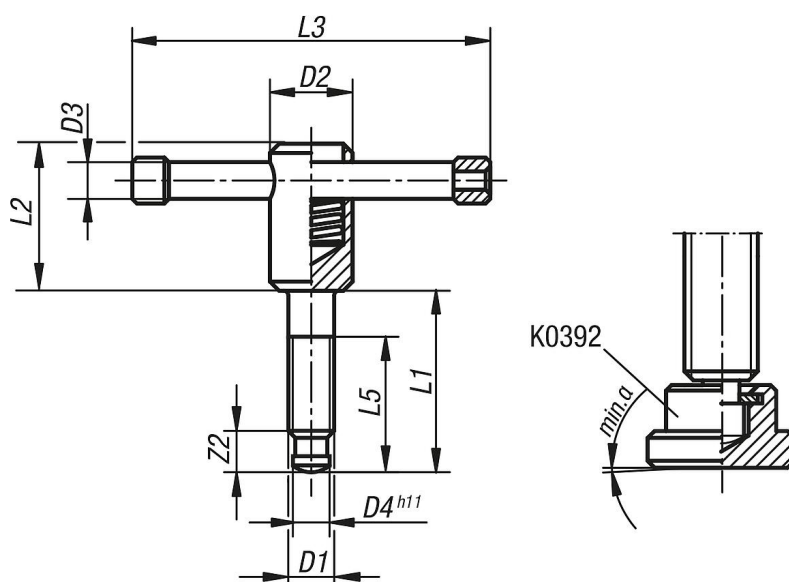

Overview of items

Order No.	Version 1	D1	D2	D3	D4	L1	L2	L3	L5	Z2	min. α
B0130.210X40	sliding t-bar	M10	18	8	8	40	32	80	30	9	3°
B0130.210X50	sliding t-bar	M10	18	8	8	50	32	80	40	9	3°
B0130.212X50	sliding t-bar	M12	20	10	8	50	35	100	40	10	3°
B0130.212X60	sliding t-bar	M12	20	10	8	60	35	100	50	10	3°
B0130.216X55	sliding t-bar	M16	24	13	12	55	40	120	45	12	5°
B0130.216X70	sliding t-bar	M16	24	13	12	70	40	120	60	12	5°
B0130.216X90	sliding t-bar	M16	24	13	12	90	40	120	80	12	5°
B0130.220X55	sliding t-bar	M20	30	16	15,5	55	45	140	45	14	4°
B0130.220X70	sliding t-bar	M20	30	16	15,5	70	45	140	60	14	4°
B0130.220X90	sliding t-bar	M20	30	16	15,5	90	45	140	80	14	4°